


height adjustable - quick assembly

Quick Assembly - Double Leg Base




Accommodates 24/30"D x 42-72"W worksurfaces.
 Height Range - 23.62"-49.21" [600-1250mm] (without top)
 Width Range - 39.37"-68.90" [1000-1750mm]
 Travel Speed - 1.50" [38mm] per second (no load)
 3 memory presets, USB-C port in controller
 Load Capacity - 100kg, 220.5lbs
 Stroke - 25.59" [650mm]
 Voltage - 100V-240V

CODE	PRICE	WIDTH (in/mm)	DEPTH (in/mm)	HEIGHT (in/mm)	VOLUME (ft ³ /m ³)	WEIGHT (lbs/kg)
TBL-AHQA-DBL-█	990	69/1750	24/610	49/1250	2.18/0.06	64/29

█ Specify base colour; base available in Black (-BK) and Silver (-SL)

Quick Assembly - Worksurfaces

24-30"D x 42-72"W laminate worksurface for double leg quick assembly base. Grommet included.



	CODE	PRICE	WIDTH (in/mm)	DEPTH (in/mm)	HEIGHT (in/mm)	VOLUME (ft ³ /m ³)	WEIGHT (lbs/kg)
24"D	TOP-2442-OG	245	42/1067	24/610	1/25	1.80/0.05	25/11
	TOP-2448-OG	280	48/1219	24/610	1/25	2.00/0.06	28/13
	TOP-2454-OG	315	54/1372	24/610	1/25	2.30/0.07	32/15
	TOP-2460-OG	350	60/1524	24/610	1/25	2.50/0.07	35/16
	TOP-2466-OG	385	66/1676	24/610	1/25	2.80/0.08	39/18
	TOP-2472-OG	420	72/1829	24/610	1/25	3.00/0.08	42/19
30"D	TOP-3042-OG	306	42/1067	30/762	1/25	2.30/0.07	31/14
	TOP-3048-OG	350	48/1219	30/762	1/25	2.50/0.07	35/16
	TOP-3054-OG	394	54/1372	30/762	1/25	2.80/0.08	39/18
	TOP-3060-OG	438	60/1524	30/762	1/25	3.10/0.10	44/20
	TOP-3066-OG	481	66/1676	30/762	1/25	3.40/0.10	48/22
	TOP-3072-OG	525	72/1829	30/762	1/25	3.80/0.11	53/24

Modesty Panels

Available in all laminate colours.

For predrilled worksurfaces.

Drawing must be provided at time of order.

	CODE	PRICE	WIDTH (in/mm)	DEPTH (in/mm)	HEIGHT (in/mm)	VOLUME (ft ³ /m ³)	WEIGHT (lbs/kg)
12"H	AH-MOD-1224	250	24/610	1/25	12/305	0.20/0.01	8/3.6
	AH-MOD-1230	265	30/762	1/25	12/305	0.40/0.01	9/4.1
	AH-MOD-1236	280	36/914	1/25	12/305	0.50/0.01	10/4.5
	AH-MOD-1242	295	42/1067	1/25	12/305	0.60/0.02	12/5.4
	AH-MOD-1248	310	48/1219	1/25	12/305	0.60/0.02	14/6.4
	AH-MOD-1254	324	54/1372	1/25	12/305	0.75/0.02	16/7.3
	AH-MOD-1260	341	60/1524	1/25	12/305	0.83/0.02	18/8.2
	AH-MOD-1266	364	66/1676	1/25	12/305	0.92/0.03	20/9.1
	AH-MOD-1272	385	72/1829	1/25	12/305	1.00/0.03	22/10
18"H	AH-MOD-1824	326	24/610	1/25	18/457	0.60/0.02	10/4.5
	AH-MOD-1830	345	30/762	1/25	18/457	0.70/0.02	12/5.4
	AH-MOD-1836	364	36/914	1/25	18/457	0.75/0.02	14/6.4
	AH-MOD-1842	383	42/1067	1/25	18/457	0.90/0.03	16/7.3
	AH-MOD-1848	402	48/1219	1/25	18/457	1.00/0.03	18/8.2
	AH-MOD-1854	421	54/1372	1/25	18/457	1.10/0.03	21/9.5
	AH-MOD-1860	443	60/1524	1/25	18/457	1.25/0.04	23/10.4
	AH-MOD-1866	473	66/1676	1/25	18/457	1.40/0.04	26/11.8
	AH-MOD-1872	502	72/1829	1/25	18/457	1.50/0.04	29/13.2

Cable Management Spine




Available in Black (-BK) and Silver (-SL).

ELE-AHWM	217	6/152	6/152	/	1.0/0.03	5/2
----------	-----	-------	-------	---	----------	-----

Note: 1" clearance around worksurface is recommended to prevent finger pinch. All worksurfaces are available in all standard 1" laminate colours. See Links laminate samples for laminate colour options.


Quick Assembly - Triple Leg Base




Accommodates 24/30"D worksurfaces.
 Height Range - 23.62"-49.21" [600-1250mm] (without top)
 Width Range - 39.65"-73.43" [1007-1865mm]
 Depth Range - 53.86"-85.28" [1368-2166mm]
 Travel Speed - 1.57" [40mm] per second (full load)
 3 memory presets, USB-C port in controller
 Input Voltage - 110VAC or 230VAC
 Load Capacity - 153 kg / 337 lbs

Extended Corner Unit Tops

Left - Grommet included.

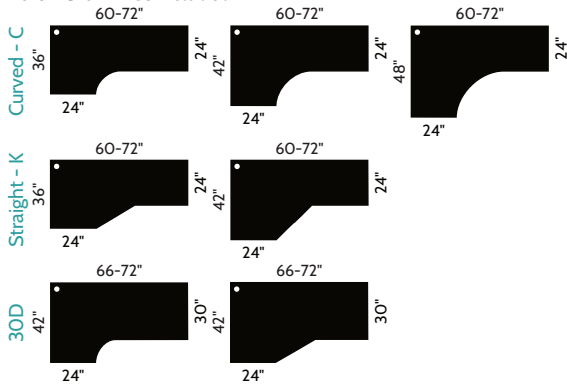

Right - Grommet included.

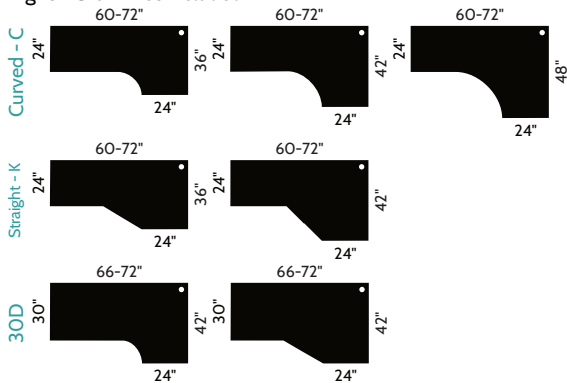

Return Tops

24"D laminate worksurface for return. Grommet included.



CODE	PRICE	WIDTH (in/mm)	DEPTH (in/mm)	HEIGHT (in/mm)	VOLUME (ft3/m3)	WEIGHT (lbs/kg)
TBL-AHQA-TRP-█	1490	73/1865	85/2166	49/1250	3.75/0.11	101/46

█ Specify base colour; base available in Black (-BK) and Silver (-SL)

LEFT	TOP-ECU2460-36-█L-OG	670	60/1524	36/914	1/25	3.8/0.11	55/25
	TOP-ECU2466-36-█L-OG	727	66/1676	36/914	1/25	4.2/0.12	58/26
	TOP-ECU2472-36-█L-OG	803	72/1829	36/914	1/25	4.5/0.13	63/29
	TOP-ECU2460-42-█L-OG	773	60/1524	42/1067	1/25	4.4/0.12	62/28
	TOP-ECU2466-42-█L-OG	856	66/1676	42/1067	1/25	4.8/0.14	68/31
	TOP-ECU2472-42-█L-OG	930	72/1829	42/1067	1/25	5.3/0.15	74/34
	TOP-ECU2460-48CL-OG	890	60/1524	48/1219	1/25	5.0/0.14	67/30
	TOP-ECU2460-48CL-OG	984	66/1676	48/1219	1/25	5.5/0.16	75/34
	TOP-ECU2460-48CL-OG	1069	72/1829	48/1219	1/25	6.0/0.17	80/36

█ Choose keyboard edge option K for straight or C for curved. Ex: TOP-ECU2472-42CL-OG
 K only available on 36", 42" depth

30"D	TOP-ECU3066-42-█L-OG	986	66/1676	42/1067	1/25	4.8/0.14	70/32
	TOP-ECU3072-42-█L-OG	1048	72/1829	42/1067	1/25	5.3/0.15	76/34
	TOP-ECU3066-42-█R-OG	986	66/1676	42/1067	1/25	4.8/0.14	70/32
	TOP-ECU3072-42-█R-OG	1048	72/1829	42/1067	1/25	5.3/0.15	76/34

█ Choose keyboard edge option K for straight or C for curved. Ex: TOP-ECU3072-42CL-OG

RIGHT	TOP-ECU2460-36-█R-OG	670	60/1524	36/914	1/25	3.8/0.11	55/25
	TOP-ECU2466-36-█R-OG	727	66/1676	36/914	1/25	4.2/0.12	58/26
	TOP-ECU2472-36-█R-OG	803	72/1829	36/914	1/25	4.5/0.13	63/29
	TOP-ECU2460-42-█R-OG	773	60/1524	42/1067	1/25	4.4/0.12	62/28
	TOP-ECU2466-42-█R-OG	856	66/1676	42/1067	1/25	4.8/0.14	68/31
	TOP-ECU2472-42-█R-OG	930	72/1829	42/1067	1/25	5.3/0.15	74/34
	TOP-ECU2460-48CR-OG	890	60/1524	48/1219	1/25	5.0/0.14	67/30
	TOP-ECU2466-48CR-OG	984	66/1676	48/1219	1/25	5.5/0.16	75/34
	TOP-ECU2472-48CR-OG	1069	72/1829	48/1219	1/25	6.0/0.17	80/36

█ Choose keyboard edge option K for straight or C for curved. Ex: TOP-ECU2472-42CL-OG
 K only available on 36", 42" depth

Returns	TOP-2424-OG	140	24/610	24/610	1/25	1.0/0.03	14/6
	TOP-2430-OG	175	30/762	24/610	1/25	1.3/0.04	18/8
	TOP-2436-OG	210	36/914	24/610	1/25	1.5/0.04	21/10
	TOP-2442-OG	245	42/1067	24/610	1/25	1.8/0.05	25/11

Note: 1" clearance around worksurface is recommended to prevent finger pinch. All worksurfaces are available in all standard 1" laminate colours. See Links laminate samples for laminate colour options.

height adjustable - quick assembly - warranty

Links Contract Furniture Inc. warrants to their authorized dealer, or the original purchaser that all laminate components are free from defects in materials and workmanship for the life of the product to the original purchaser. Warranty for electric parts is three years, and five years for mechanical parts on height adjustable desk bases.

Links Contract Furniture Inc. agrees to repair and or replace any component which upon inspection proves to be original, unaltered and defective upon proof of purchase (which is to include the original invoice from the authorized dealer). This document is the only proof of purchase that Links Contract Furniture Inc. will accept in order to proceed with any claim.

Links Contract Furniture Inc. obligation under this warranty is limited to the replacement cost of parts. Links Contract Furniture Inc. will not be liable for consequential or incidental damages that may arise from a claim of defective workmanship, components and product.

Links Contract Furniture Inc. warranty does not apply to products affected as a result of any form of neglect, alteration, customization, nominal or normal wear and tear, colour-fastness or matching of colours, or damage caused by storage, mishandling, intentional abuse, fire, flood, transportation, natural disaster, or any application to which the furniture was not clearly intended, or use and installation other than in accordance with written instructions or warning. Links Contract Furniture Inc. warranty does not apply to natural variations in wood or other materials and these variations will not be considered defects by manufacturer.

Links Contract Furniture Inc. warranty does not extend to labour, delivery, and/or installation costs and applies only to the United States and Canada.

Links Contract Furniture Inc. warranty is for normal commercial use only and does not apply to products used for rental purposes.