HEIGHT ADJUSTABLE TABLES

LINKS
CONTRACT FURNITURE INC.

2022-01-01 CATALOGUE

HEIGHT ADJUSTABLE TABLES
2022-01-01 USD CATALOGUE

2 DOUBLE LEG

4 TRIPLE LEG

6 SINGLE LEG

7 ACCESSORIES

8 PRICING

Height Range— 23.5" to 49.5" (without desktop)
Base Spread — 24"
Travel Speed — 1.5" per second (no load)
Load Capacity — 1000N, 225lbs
Duty Cycle — 10% max, 2 mins on, 18 mins off
Soft start/stop
Adjustable leveling studs
4 memory presets
UL/CSA Approved
Accommodates 24"/30"x48"-72" worksurfaces

DOUBLE LEG

The two legged height adjustable base is twenty-four inches in depth and has a width that spreads forty to seventy-one inches allowing it to accommodate our standard worksurfaces over twenty four inches deep and a recommended forty eight to seventy two inches wide. These electronic metal bases come with controls that have four programmable settings and a height range of twenty-three and a half to forty-nine and a half inches. All bases are UL/CSA approved and have a load capacity of 1000N, 225 lbs. Finish colours available for this double leg adjustable height base include Black (BK), Silver (SL), and White (WH).

Height Range— 23.5" to 49.5" (without desktop)
Base Spread — 24"
Travel Speed — 1.5" per second (no load)
Load Capacity — 1500N, 337lbs
Duty Cycle — 10% maximum, 2 mins on, 18 mins off
Soft start/stop
Adjustable leveling studs
4 memory presets
UL/CSA Approved

TRIPLE LEG

The three legged height adjustable base is forty to seventy-one inches wide and can accommodate an overall depth of 48"-72" inches. These electronic metal bases come with controls that have four programmable settings and a height range of twenty-three and a half to forty-nine and a half inches, allowing both main and return worksurfaces to move together. All bases are UL/CSA approved and have a load capacity of 1500N, 337 lbs. Finish colours available for this triple leg adjustable height base include Black (BK), and Silver (SL).

Height Range— 27" to 45" (without desktop)
Base Spread — 24"
Travel Speed — 1.5" per second (no load)
Load Capacity — 800N, 180lbs
Duty Cycle — 10% max, 2 mins on, 18 mins off
Soft start/stop
Adjustable leveling studs
4 memory presets
UL/CSA Approved

SINGLE LEG

The single leg height adjustable base is twenty-four inches deep overall by twenty-seven and a half wide. It accommodates twenty-four and thirty inch deep worksurfaces, thirty-six and fourty-two inches wide. These electronic metal bases come with controls that have four programmable settings and a height range of twenty-seven to forty-five inches. All bases are UL/CSA approved and have a load capacity of 800N, 180 lbs. This triple leg adjustable height base is available in Black (BK).

ACCESSORIES

MODESTY

Add a stylish modesty panel to your height adjustable worksurface to allow for privacy during your work day. Available in all standard Links finishes in various sizes. Worksurfaces will be predrilled to accept modesty panel when a drawing is supplied with your order.

WIRE MANAGEMENT

Add a smart and conveniently coiled wire management to your height adjustable worksurface to hide all wires. The coil will adjust to the height as you raise and lower the worksurface. Available in Black or Silver.

PRICING

TOPS

MAIN WORKSURFACE

24"-30"D laminate worksurface for double leg base or primary on triple leg base. Grommet included.

EXTENDED CORNER TOPS

Left - Grommet included.

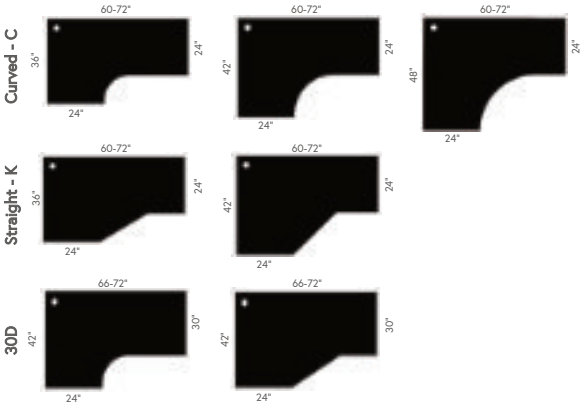

Right- Grommet included.

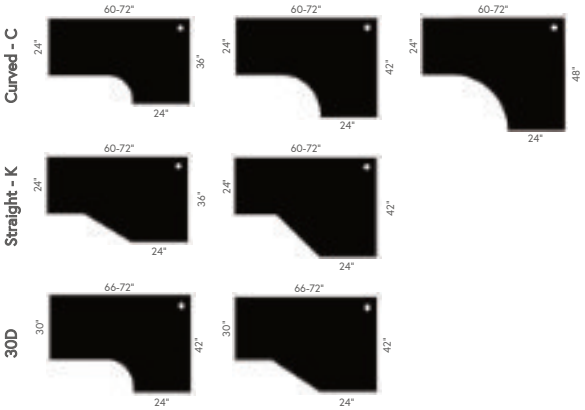

RETURN TOPS

24"D laminate worksurface for return. Grommet incl.

SINGLE LEG TOPS

24"-30"D laminate worksurface for single leg base.



	CODE	PRICE	WIDTH (in/mm)	DEPTH (in/mm)	HEIGHT (in/mm)	VOLUME (ft3/m3)	WEIGHT (lbs/kg)
24"D	TOP-2448-OG	296	48/1219	24/610	1/25	2.0/0.06	28/13
	TOP-2454-OG	334	54/1372	24/610	1/25	2.3/0.07	32/15
	TOP-2460-OG	371	60/1524	24/610	1/25	2.5/0.07	35/16
	TOP-2466-OG	407	66/1676	24/610	1/25	2.8/0.08	39/18
	TOP-2472-OG	445	72/1829	24/610	1/25	3.0/0.08	42/19
30"D	TOP-3048-OG	371	48/1219	30/762	1/25	2.5/0.07	35/16
	TOP-3054-OG	418	54/1372	30/762	1/25	2.8/0.08	39/18
	TOP-3060-OG	463	60/1524	30/762	1/25	3.1/0.09	44/20
	TOP-3066-OG	510	66/1676	30/762	1/25	3.4/0.10	48/22
	TOP-3072-OG	557	72/1829	30/762	1/25	3.8/0.11	53/24

	TOP-ECU2460-36_L-OG	591	60/1524	36/914	1/25	3.8/0.11	55/25
	TOP-ECU2466-36_L-OG	643	66/1676	36/914	1/25	4.2/0.12	58/26
	TOP-ECU2472-36_L-OG	708	72/1829	36/914	1/25	4.5/0.13	63/29
	TOP-ECU2460-42_L-OG	683	60/1524	42/1067	1/25	4.4/0.12	62/28
	TOP-ECU2466-42_L-OG	756	66/1676	42/1067	1/25	4.8/0.14	68/31
	TOP-ECU2472-42_L-OG	822	72/1829	42/1067	1/25	5.3/0.15	74/34
	TOP-ECU2460-48CL-OG	787	60/1524	48/1219	1/25	5.0/0.14	67/30
	TOP-ECU2466-48CL-OG	869	66/1676	48/1219	1/25	5.5/0.16	75/34
	TOP-ECU2472-48CL-OG	944	72/1829	48/1219	1/25	6.0/0.17	80/36

Choose keyboard edge option: K for straight or C for curved. Ex: TOP-ECU2472-48CL-OG
K only available in 36", 42" depth

30"D	TOP-ECU3066-42_L-OG	863	66/1676	42/1067	1/25	4.8/0.14	70/32
	TOP-ECU3072-42_L-OG	925	72/1829	42/1067	1/25	5.3/0.15	76/34
	TOP-ECU3066-42_R-OG	863	66/1676	42/1067	1/25	4.8/0.14	70/32
	TOP-ECU3072-42_R-OG	925	72/1829	42/1067	1/25	5.3/0.15	76/34

Choose keyboard edge option: K for straight or C for curved. Ex: TOP-ECU3072-42CL-OG

	TOP-ECU2460-36_R-OG	591	60/1524	36/914	1/25	3.8/0.11	55/25
	TOP-ECU2466-36_R-OG	643	66/1676	36/914	1/25	4.2/0.12	58/26
	TOP-ECU2472-36_R-OG	708	72/1829	36/914	1/25	4.5/0.13	63/29
	TOP-ECU2460-42_R-OG	683	60/1524	42/1067	1/25	4.4/0.12	62/28
	TOP-ECU2466-42_R-OG	756	66/1676	42/1067	1/25	4.8/0.14	68/31
	TOP-ECU2472-42_R-OG	822	72/1829	42/1067	1/25	5.3/0.15	74/34
	TOP-ECU2460-48CR-OG	787	60/1524	48/1219	1/25	5.0/0.14	67/30
	TOP-ECU2466-48CR-OG	869	66/1676	48/1219	1/25	5.5/0.16	75/34
	TOP-ECU2472-48CR-OG	944	72/1829	48/1219	1/25	6.0/0.17	80/36

Choose keyboard edge option: K for straight or C for curved. Ex: TOP-ECU2472-48CR-OG
K only available in 36", 42" depth

Returns	TOP-2424-OG	158	24/610	24/610	1/25	1.0/0.03	14/6
	TOP-2430-OG	197	30/762	24/610	1/25	1.3/0.04	18/8
	TOP-2436-OG	236	36/914	24/610	1/25	1.5/0.04	21/10
	TOP-2442-OG	276	42/1067	24/610	1/25	1.8/0.05	25/11

SGL	TOP-2436-OG-POS_	236	36/914	24/610	1/25	1.5/0.04	21/10
	TOP-2442-OG-POS_	276	42/1067	24/610	1/25	1.8/0.05	25/11
	TOP-3036-OG-POS_	297	36/914	30/762	1/25	1.6/0.05	27/12
	TOP-3042-OG-POS_	341	42/1067	30/762	1/25	1.9/0.05	31/14

Grommet available in Position 1 (POS1), and Position 3 (POS3)

Note: 1" clearance around worksurface is recommended to prevent finger pinch. All worksurfaces are available in all standard 1" laminate colours.
See Links laminate samples for worksurface options.

DOUBLE LEG BASE

Base available in Black (-BK), Silver (-SL) and White (-WH).



TRIPLE LEG BASE

Base available in Black (-BK) and Silver (-SL).

SINGLE LEG BASE

Base only available in Black.



MODESTY PANELS

Available in all laminate colours for double and triple leg desks.

CABLE MANAGEMENT SPINE

Available in Black (-BK) and Silver (-SL).

CODE	PRICE	WIDTH (in/mm)	DEPTH (in/mm)	HEIGHT (in/mm)	VOLUME (ft3/m3)	WEIGHT (lbs/kg)
TBL-AHTB-DBL	1704	72/1829	23.5/597	50/1270	2/0.06	67/30
TBL-AHTB-TRP	2491	72/1829	65/1651	50/1270	3.5/0.1	85/39
TBL-AHTB-SGL-BK	1444	27.5/699	24/610	50/1270	3/0.08	50/23
AH-MOD-1248	272	48/1219	1/25	12/305	0.60	14
AH-MOD-1254	286	54/1372	1/25	12/305	0.75	16
AH-MOD-1260	302	60/1524	1/25	12/305	0.83	18
AH-MOD-1266	321	66/1676	1/25	12/305	0.92	20
AH-MOD-1272	341	72/1829	1/25	12/305	1.00	22
AH-MOD-1848	354	48/1219	1/25	18/457	1.00	18
AH-MOD-1854	372	54/1372	1/25	18/457	1.10	21
AH-MOD-1860	393	60/1524	1/25	18/457	1.25	23
AH-MOD-1866	417	66/1676	1/25	18/457	1.40	26
AH-MOD-1872	443	72/1829	1/25	18/457	1.50	29
ELE-AHWM	191	6/152	6/152	/0	1/0.03	5/2

For predrilled worksurfaces, drawing must be provided at time of order.

While every effort is made to ensure the accuracy of information contained in this price list at the time of publication, we cannot accept responsibility for inaccuracies resulting from printing errors or omissions. We reserve the right to make product improvements and price changes without notice.

© Copyright 2022 Links Contract Furniture Inc.. All Rights Reserved.

Head Office/Showroom:	141 Cidermill Ave, Unit #1	Concord, Ontario	Canada	L4K 4G5
Local & International:	P: 416.745.8910			
Toll Free - North America:	P: 855-50-LINKS (855.505.4657)			
Email:	info@linkscontract.com			
Website:	linkscontract.com			